



DIRECTORY

Instruction Manual

WIFI BATTERY CAMERA

Product categories

Technical Parameters

APP Download&Installation

Register and log in

Add Device

View&Setting

FAQ

Device prompt and indicator condition

1

4

5

5







6

9

9

10

Product categories

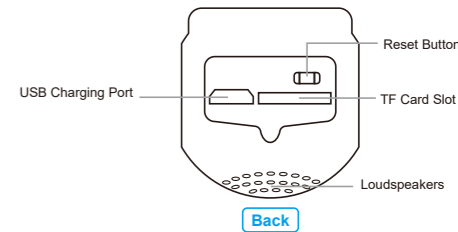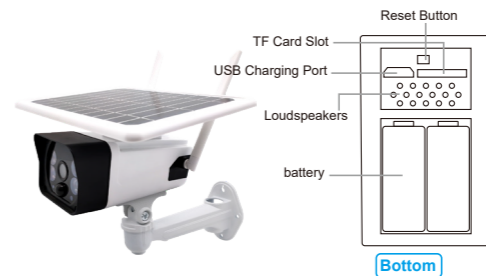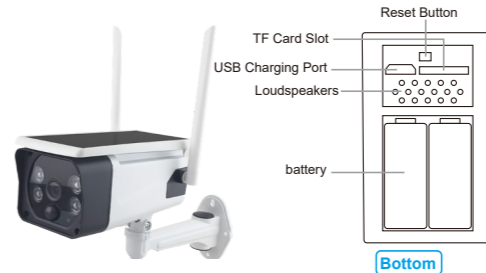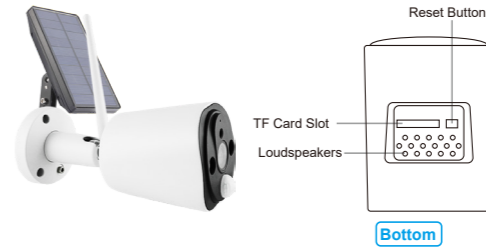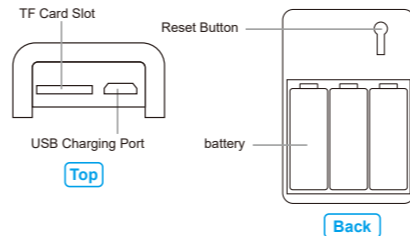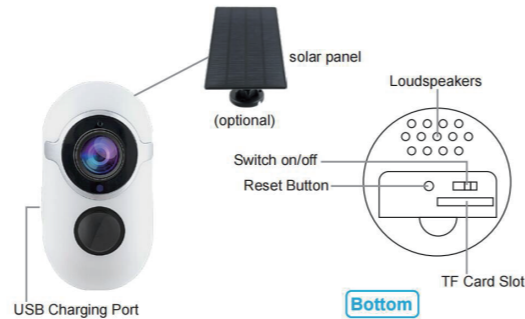

Technical Parameters:

Resolution: 720X1280 1920X1080 Video bit rate: adaptive
 Viewing angle: 135-165° Support capacity: Up to 128G
 Audio: Built-in speaker & Microphone WiFi Mode: 2.4GHz 802.11n/g/n
 Power Supply: DC 5V Battery: Rechargeable Battery
 Motion Detection: PIR Sensor
 Recording method: SD Memory Card/ Cloud Storage
 Power consumption: Standby 200uA, Working 260mA

APP Download&Installation

1:Quick download APP by scanning QR Code as following.

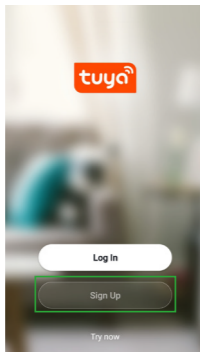


figure 1

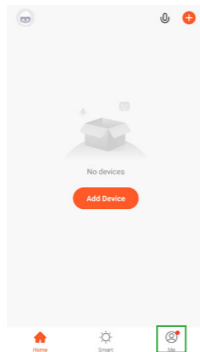


figure 2

2:Search for 'TuyaSmart ' app in App Store(for IOS)/App Market, or scan the above QR code to download.

This camera only support 2.4G WiFi, not support 5G WiFi router and please make sure,the phone and router Network is 2.4 G WiFi connection To ensure the normal use of the APP function, when installing "TuyaSmart" APP, please allow and open the APP all permissions!

Add Device

In APP Home page, click on the "Add Device" or upper right "+", you can choose " Add Manually" (figure 3), select "Security&Video Surveillance--Smart Camera(Wi-Fi)" (figure 4) to add equipment




figure 3




figure 4

Please make sure the camera in distribution network model (status indicator light red light flash)(figure. 5)
Choose "Make sure the indicator is flashing quickly or a prompt tone is heard",click "Next".
enter phone connected WiFi password(figure 6) , click next

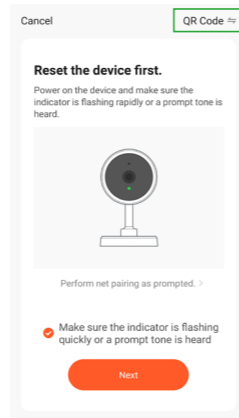


figure 5

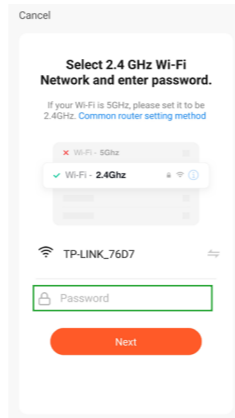


figure 6

APP appear QR Code distribution network guide interface, aim the QR Code camera lens about 15cm to 20cm (figure 7) when hearing Prompt, click on the "I Heard a Prompt" , enter the next step;
Equipment began to connect to the server, please wait until the complete distribution network. (figure 8)



figure 7

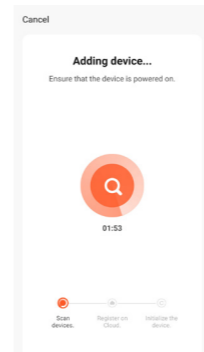


figure 8

Appear (figure 9) page, that device has been added successfully. Here you can name for this device

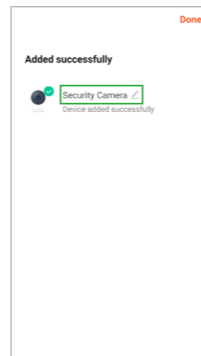


figure 9

View&Setting

Click device, enter the camera preview control interface (figure 10), interface display picture, for clarity and full screen switch operations and, at the bottom of the menu can provide photos, intercom, video playback, alarm Settings, pendant, direction and so on.
Click upper right Setting button, and enter the Settings interface (as shown in figure 11), you can set the camera to share, the basic function, and so on.




figure 10




figure 11

Register and log in

Open the APP, if you haven't account, click on the "Sign Up" (figure 1), enter the registration screen, enter a phone number registered account. Registration is completed, then login APP.

After login the APP, you can directly select "add device" or choose to create family after add, create family methods: APP at the bottom right corner click on "my" choice "family management", "my home" fill in the information&save (figure 2).

Device prompt and indicator condition

Prompt state	Device state
Drop 1 sound	Equipment in accordance with the "reset button" 5 seconds, enter the reset state instantly, 1 "drop" sound equipment
Drop 2 sound	Distribution network process, equipment, lens scanning QR code APP instant success, sound equipment "drops" 2
Soft Music	In the process of distribution network, equipment successfully connected ,routers equipment will play some soft music
Indicator State	Device state
Red flashing quickly	Device reset (wait for distribution network state,) long press equipment "reset button" 5 seconds
Blue flashing slowly	Device is in wake-up state and has been successfully connected routers and servers
Red flashing slowly	Device is under waking up and offline (device and router disconnected or router network)
No lighting	Device was sleeping or blackout or user active closed working indicator light
Blue flashing quickly	Device is downloading the new firmware and upgrading the firmware (after the successful upgrade of the firmware , light is back to normal status)